




- NOTES:
1. CONTROL PANEL WITH NEMA 1 ENCLOSURE SHALL BE INSTALLED WHERE SHOWN.
 2. STEEL BASIN COVER SHALL BE A GRATING WITH OPENINGS AS REQUIRED FOR DESIGN PIPING, INLET PIPING (SAME AS FOR EXISTING SUMP PIT) AND CONTROLS.
 3. EACH PUMP SHALL BE AS FOLLOWS: 100 GPM, 30 FT-HD, 1750 RPM, 1 1/2 HP, 460 VOLTS, 3 PH, 60 HZ, FEDERAL PUMP CORP. MODEL VSS-2 1/2-11 1/2 -4.

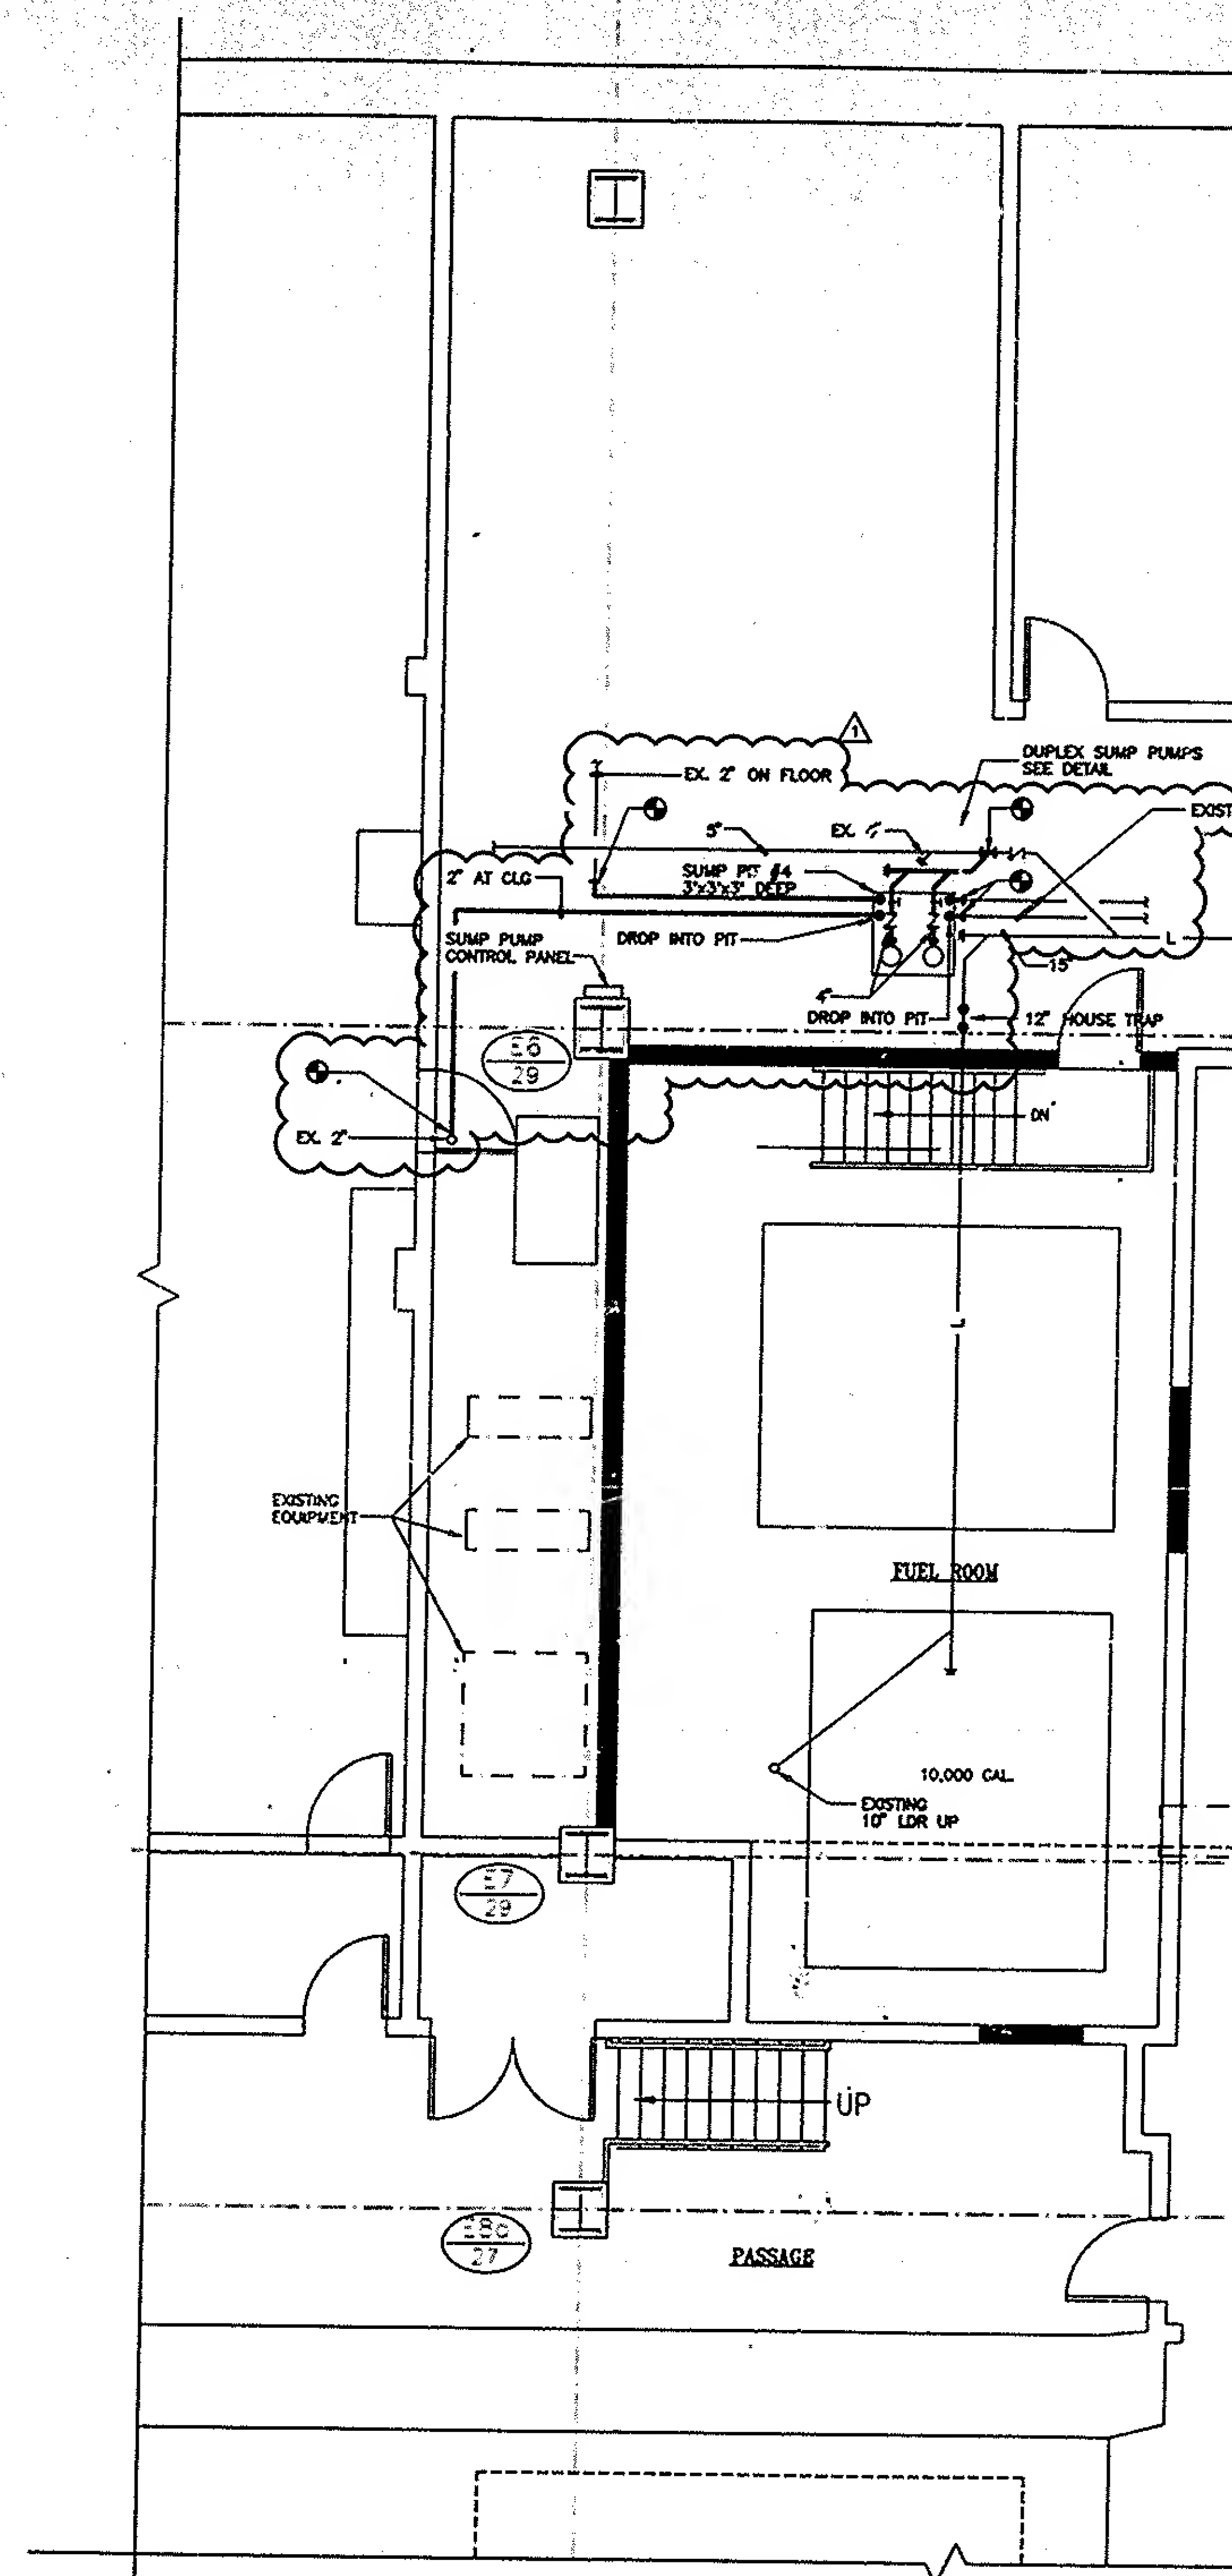

5 WTC PART PLAN B
FUEL OIL TANK F